


The C5 is a high performing and utterly compact, universally applicable passive loudspeaker. Its 110° wide radiating 5" coaxial driver predestinates it particularly for near field applications, for example as a front fill or as an inconspicuous monitor in a TV studio next to the couch.

At the same time this „little“ one can be amazingly loud and surprises the audience with extremely low distortion and natural reproduction. According to custom at TWAUDI there is also a carefully constructed and precisely balanced passive crossover which allows direct use on standard amplifiers without additional adjustments.

Thanks to the elaborately constructed integral rigid foam enclosure and shock resistant PU varnish which is standard, the C5 is suitable for permanent outdoor installations.



## Key Features

- » Compact, lightweight (3.9 kg | 8.6 lbs) universally applicable passive loudspeaker.
- » 110° wide radiating 5" coaxial driver.
- » Passive crossover allows direct use on standard amplifiers without additional adjustments.
- » Several installation accessories available.
- » IP54 rating achieved with WPC5 installation cover (with cable gland) mounted.
- » Coherent phase response with all TWAUDI subwoofers.
- » Operation with dedicated TWAUDI presets on Lab.gruppen or Powersoft series.


TWAUDIO GmbH  
Osterholzallee 140-1  
71636 Ludwigsburg  
Germany

Tel.: +49 7141 488989-0  
Fax: +49 7141 488989-99  
Mail: info@twaudio.com


## Technical Data



Drivers	1 x 5" LF   1 x 1" HF coaxial
Frequency range	90 Hz - 20000 Hz
Power capacity program/peak	250/500 W
Impedance	24 Ω (passive)
Coverage	110° radial
Sensitivity 1 W / 1 m	91 dB
SPL max / 1 m	117 dB
Connectors	speakON™ NL4 1±   push terminal 1±
Dimensions (H x W x D)	240 x 160 x 160 mm   9.45 x 6.3 x 6.3"
Weight	3.9 kg   8.6 lbs
Finish	Warnex texture paint, RAL colors optional
Accessories	BagC5, MKC5, WHC5, WPC5

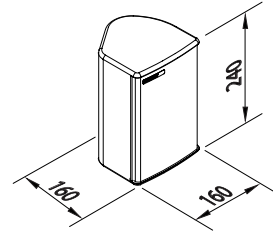

## System Proposal

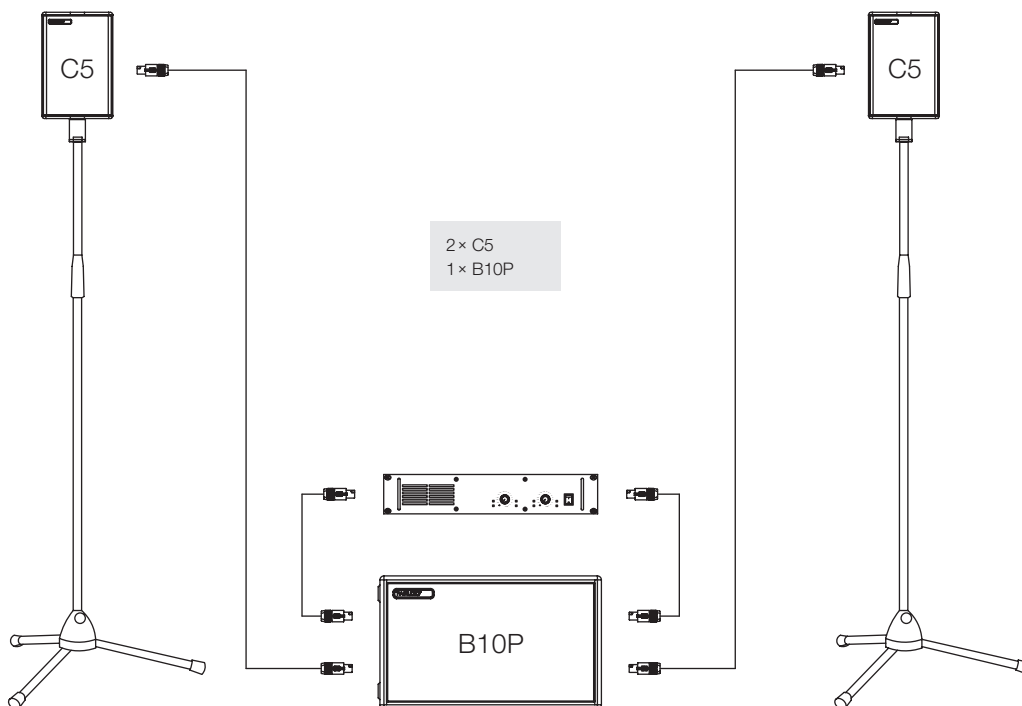

PRESETS AVAILABLE FOR



**LAB.GRUPPEN**